


'Blueberry' Cable Specification

All Thames Side Sensors load cells are fitted with a specially designed and manufactured polyurethane cable which as well as being extremely tough, has excellent resistance to chemicals, mud etc.



Conductor current rating;	1 amp
Conductor Resistance;	92.4 ohms/1000 metres maximum at 20°C
Capacitance;	115 pF/meter maximum
Insulation resistance;	5000 Mohms/1000 metres minimum at 20°C

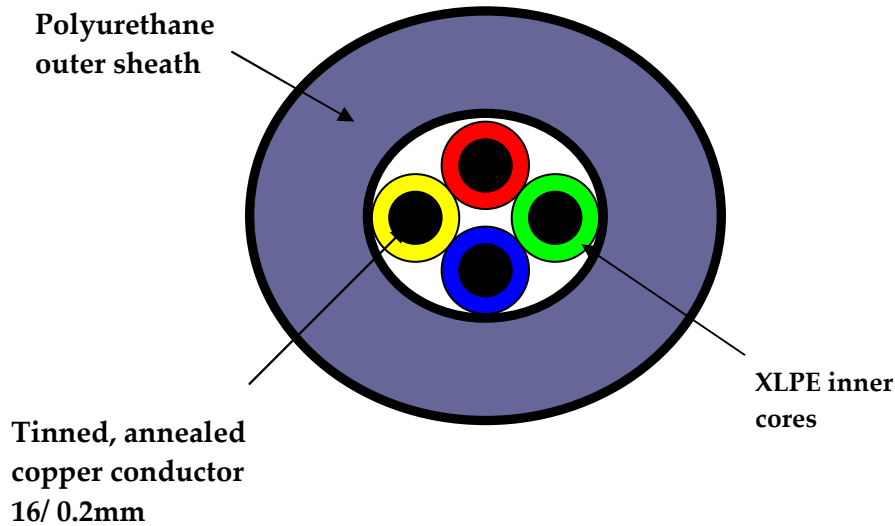